

# ELECTRIC RT SCISSOR LIFT

## SPECIFICATIONS

MODELS	SR1218E-2	
Measurements	Metric	Imperial
Work Height Max.	14m	45'11"
<b>A</b> Platform Height - Raised	12m	39'4"
Platform Height - Stowed	1.45m	4'9"
<b>B</b> Platform Length	2.79m	9'2"
<b>C</b> Extension Deck	1.52m	5'
<b>D</b> Platform Length with Extension Deck	4.31m	14'2"
<b>E</b> Platform Width	1.6m	5'3"
<b>F</b> Overall Length	3.76m	12'4"
<b>G</b> Overall Width	1.79m	5'10"
<b>H</b> Overall Height - Rails up	2.55m	8'4"
Overall Height - Rails down	1.89m	6'2"
<b>I</b> Wheelbase	2.3m	7'7"
Ground Clearance	0.24m	9"

## PRODUCTIVITY

Max. Platform Occupancy (in/out)	3 / 2	
Platform Capacity	365kg	805 lbs
Platform Capacity - Extension	140kg	309 lbs
Drive Height	Full Height	
Gradeability - Stowed	35%	
Min. Turning Radius	2.46m	8'1"
Raise/Lower Speed	35 / 30s	
Drive Mode	Four-wheel drive	
Tire Type	Foam-filled tire	
Tire Size	663x283mm	26"x11"

## POWER


Power Source	72V 120Ah	
--------------	-----------	--

## HYDRAULIC SYSTEM

Hydraulic Oil Volume	50L	13.2gal
----------------------	-----	---------

## WEIGHT

Machine Weight	4,730kg	10,428 lbs
----------------	---------	------------

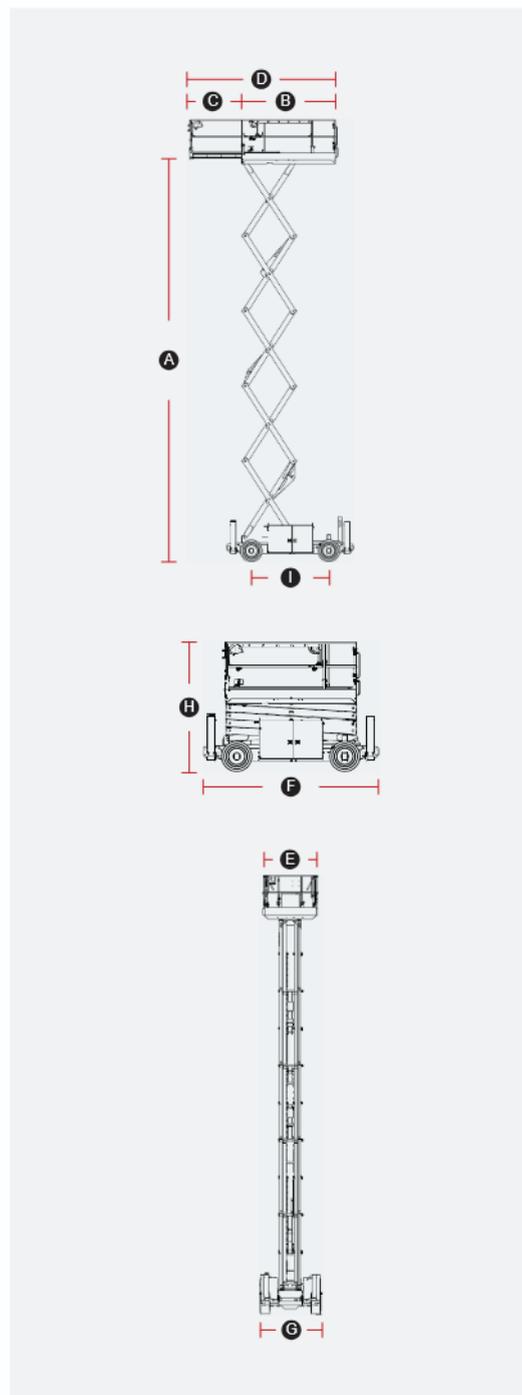

Please contact LGMG or a local dealer for more details.

LMGM reserves the right to change technical data without prior notice. All photos and pictures in this brochure are for promotional purposes only.